


Remove the cover and black plate for wiring

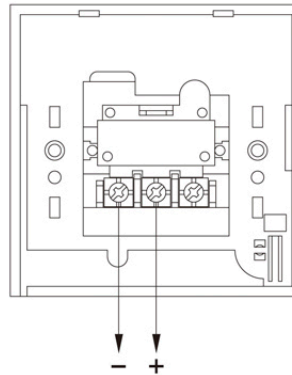

## AH-0217

Issue Number : 20050204


### INSTALLATION DETAILS

#### Flush Call Point :

The flush call point will mount onto any standard U.K. single gang back box with a depth of 25mm or greater. Consideration should be given to the amount of cabling space at the rear of the call point, i.e. a deeper box eases installation.

#### Surface Call Point :

The surface mounting call point comes complete with a back box which the call point is mounted onto. There is provision for rear cable entry, and by using the template on the packaging, cable entry holes can be drilled into the call point back box for one or two 20mm cable glands.

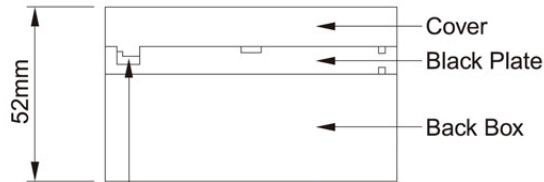

**Test Function :**  
Push ket in firmly as far as possible. Pull. The call point is then activated. To end test reverse above procedure.

### ELECTRICAL DETAILS

Call Point Type	Standard	No/Nc	50-250V
Nominal Voltage	24VDC		
Termination	Screw terminals that accept 0.28mm <sup>2</sup> -2.5mm <sup>2</sup> conductors		
Maximum Voltage	50VAC @50-60Hz/50VDC	50VAC @50-60Hz/50VDC	250VAC @50-60Hz
Maximum Current	1.00A	1.00A	1.25A
Maximum Contact Resistance	0.15 Ohms	0.1 Ohms	0.1 Ohms
Source Impredance	Resistive	Resistive	Resistive
Power Rating	See Note 1	3 Watts	5 Watts

Note 1. Where used, all internal monitoring resistors are a 1 Watt power rating.  
Do not exceed power rating of the resistors.